


Top Plate

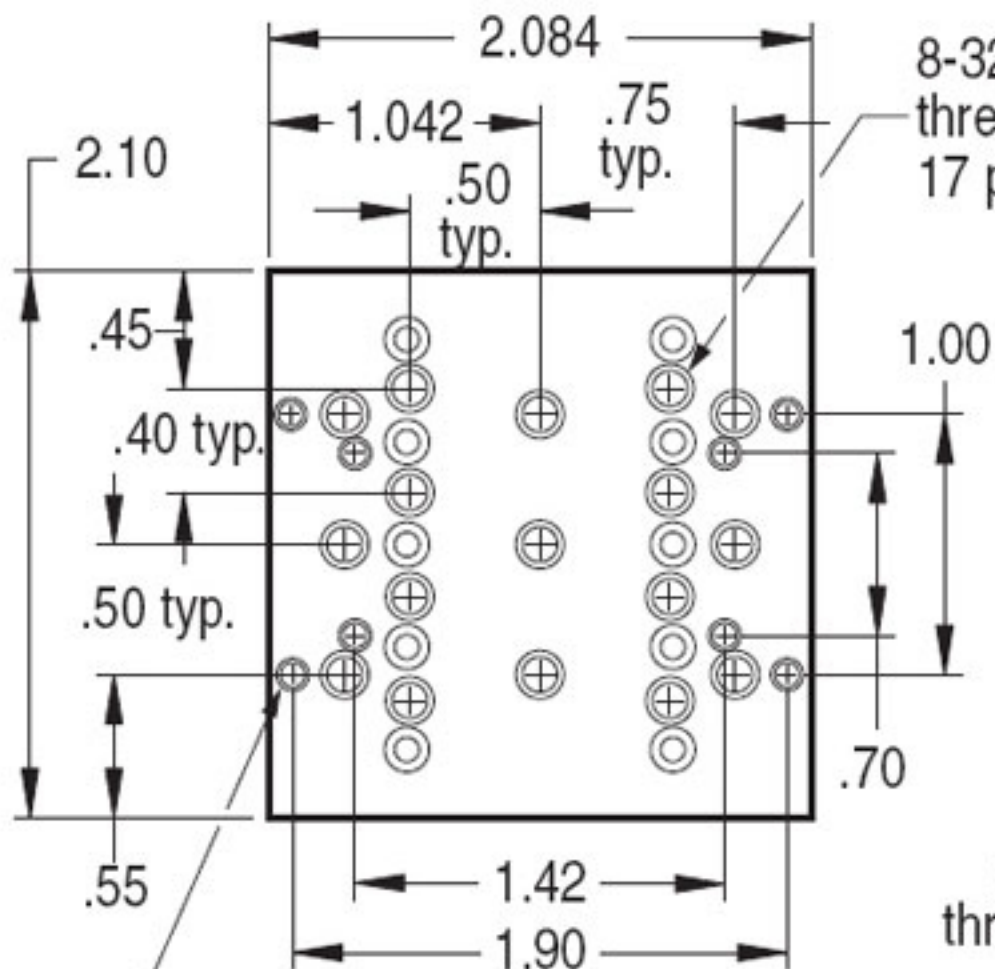

4-40 (M2.5) threaded hole, 8 places

Bottom Plate

8-32 (M4) threaded hole, 17 places

8-32 (M4) threaded hole, 9 places

4-40 (M2.5) threaded hole, 4 places

Clearance for 4-40 or M2.5 cap screw, 4 places

Dimensions in parentheses reflect metric assembly features

