


Top Plate


8-32 (M4) threaded hole,
25 places

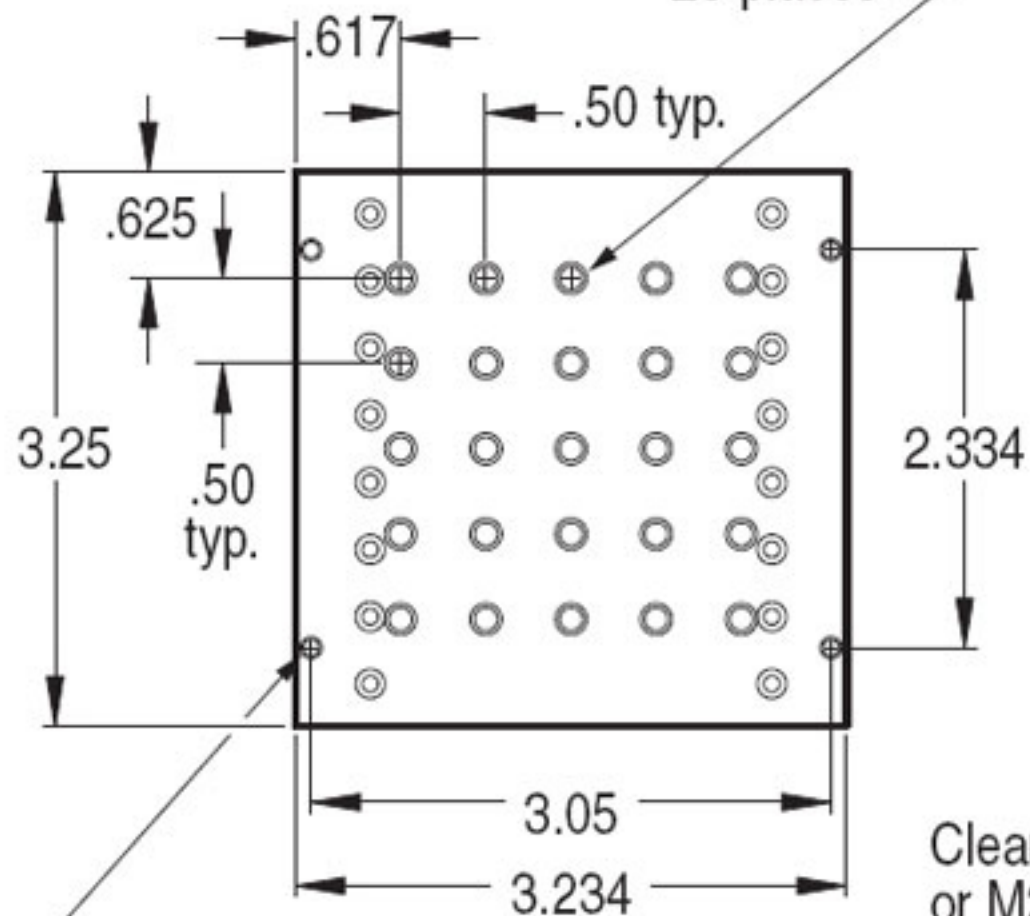

4-40 (M2.5) threaded hole,
4 places

Bottom Plate

8-32 (M4) threaded hole,
25 places

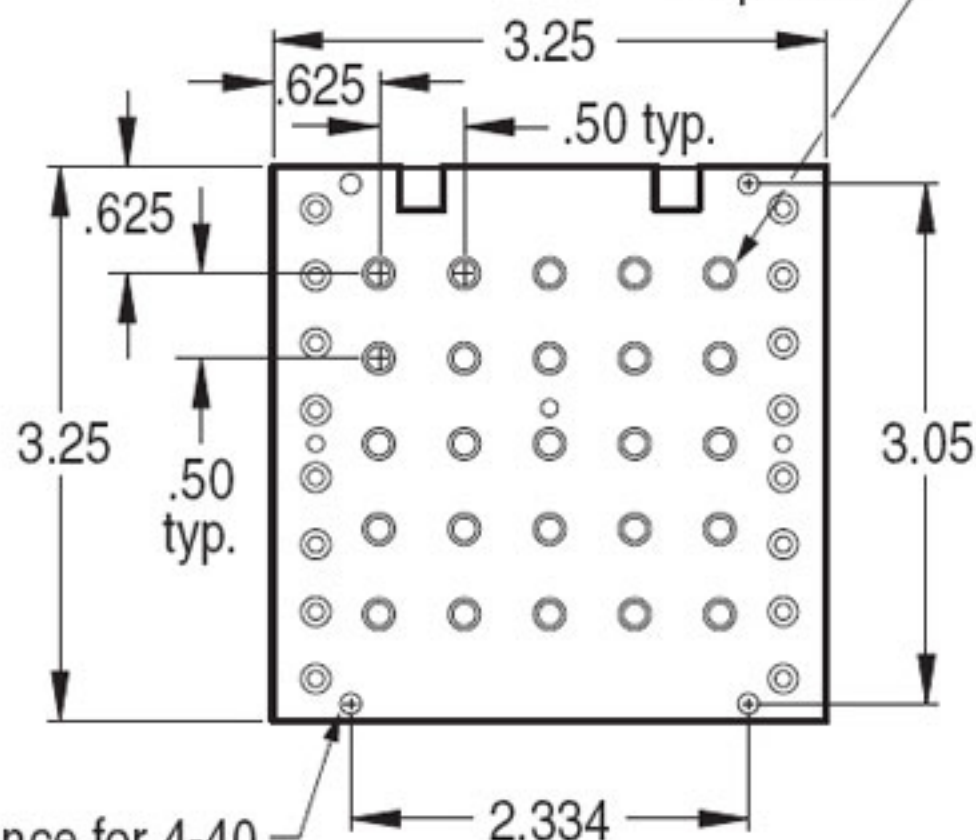

Clearance for 4-40
or M2.5 cap screw,
4 places

Dimensions in parentheses
reflect metric assembly features